



ZT431 Adjustable Precision Shunt Regulations

Features

- Programmable Precise Output Voltage from 2.5V to 36V
- Low Temperature Deviation: 5mV Typical
- Low Equivalent Full-range Temperature Coefficient
- Sink Current Capacity from 1mA to 100 mA
- Low Output Noise
- Wide Operating Range of -40 to 125°C
- ROHS/Halogen Free

Applications

- Charger
- Voltage Adapter
- Switching Power Supply
- Graphic Card
- Precision Voltage Reference

General Description


The ZT431 is a three-terminal adjustable shunt regulator with guaranteed thermal stability over a full operation range. It features sharp turn-on characteristics, low temperature coefficient and low output impedance, which make it ideal substitute for Zener diode in applications such as switching power supply, charger and other adjustable regulators.

The output voltage of ZT431 can be set to any value between V_{ref} (2.495V) and the corresponding maximum cathode voltage (36V).

The ZT431 precision reference is offered in two voltage tolerance: 0.5% and 1%.

This IC is available in 4 Packages: SOT-23 and TO92.

Block Diagram

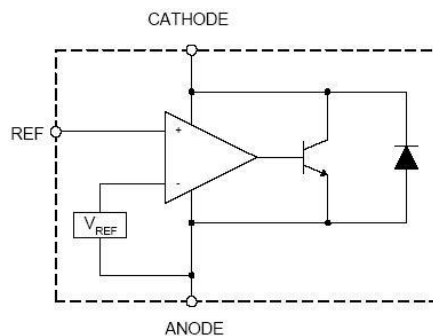



ZT431 Adjustable Precision Shunt Regulations

Pin Assignment

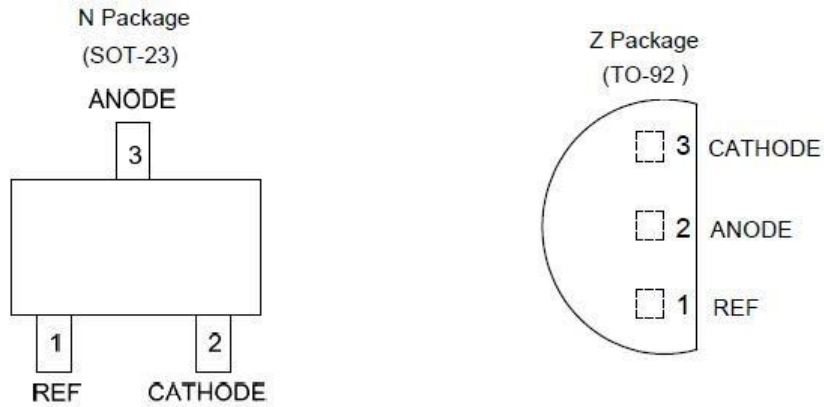


Figure 2. Pin Configuration of ZT431

Absolute Maximum Ratings (Note 5)

Symbol	Parameter	Rating	Unit
V_{KA}	Cathode Voltage	40	V
I_{KA}	Cathode Current Range (Continuous)	-100 to 150	mA
I_{REF}	Reference Input Current Range	10	mA
P_D	Power Dissipation	Z, R Package	770
		N, K Package	370
T_J	Junction Temperature	+150	°C
T_{STG}	Storage Temperature Range	-65 to +150	°C
ESD	ESD (Human Body Model)	2000	V

Note 5: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V_{KA}	Cathode Voltage	V_{REF}	36	V
I_{KA}	Cathode Current	1.0	100	mA
T_A	Operating Ambient Temperature Range	-40	+125	°C



ZT431 Adjustable Precision Shunt Regulations


Electrical Characteristics (Operating Conditions: $T_A = +25^\circ\text{C}$, unless otherwise specified.)

Symbol	Parameter	Test Circuit	Conditions	Min	Typ	Max	Unit	
V_{REF}	Reference Voltage	4	$V_{KA} = V_{REF}, I_{KA} = 10\text{mA}$	2.483	2.495	2.507	V	
				2.470	2.495	2.520		
ΔV_{REF}	Deviation of Reference Voltage Over Full Temperature Range	4	$V_{KA} = V_{REF}, I_{KA} = 10\text{mA}$	0 to $+70^\circ\text{C}$	–	5	20	mV
				-40 to $+85^\circ\text{C}$	–	5	26	
				-40 to $+125^\circ\text{C}$	–	5	40	
$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	Ratio of Change in Reference Voltage to the Change in Cathode Voltage	5	$I_{KA} = 10\text{mA}$	$\Delta V_{KA} = 10\text{V to } V_{REF}$	–	-1.0	-2.7	mV/V
				$\Delta V_{KA} = 36\text{V to } 10\text{V}$	–	-0.5	-2.0	
I_{REF}	Reference Current	5	$I_{KA} = 10\text{mA}, R1 = 10\text{K}\Omega, R2 = \infty$	–	0.7	4	μA	
ΔI_{REF}	Deviation of Reference Current Over Full Temperature Range	5	$I_{KA} = 10\text{mA}, R1 = 10\text{K}\Omega, R2 = \infty, T_A = -40$ to $+125^\circ\text{C}$	–	0.4	1.2	μA	
I_{KA} (Min)	Minimum Cathode Current for Regulation	4	$V_{KA} = V_{REF}$	–	0.4	1.0	mA	
I_{KA} (Off)	Off-state Cathode Current	6	$V_{KA} = 36\text{V}, V_{REF} = 0$	–	0.5	1.0	μA	
Z_{KA}	Dynamic Impedance	4	$V_{KA} = V_{REF}, I_{KA} = 1$ to $100\text{mA}, f \leq 1.0\text{KHz}$	–	0.2	0.5	Ω	
θ_{JC}	Thermal Resistance	–	SOT-23	–	135.9	–	$^\circ\text{C/W}$	
			TO-92	–	81.9	–		




ZT431 Adjustable Precision Shunt Regulations


Typical Applications Circuit

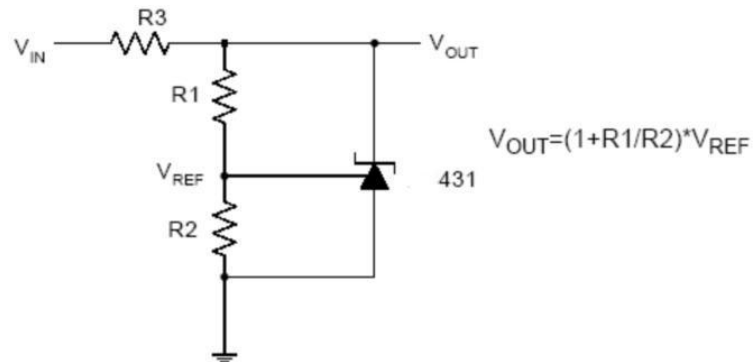

Shunt Regulator

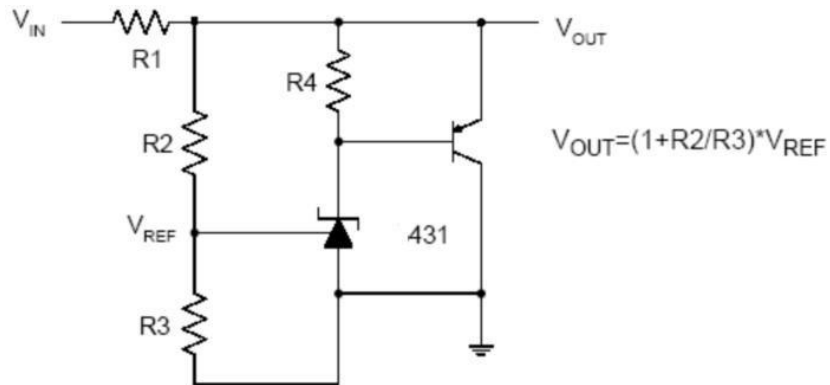


High Current Shunt Regulator

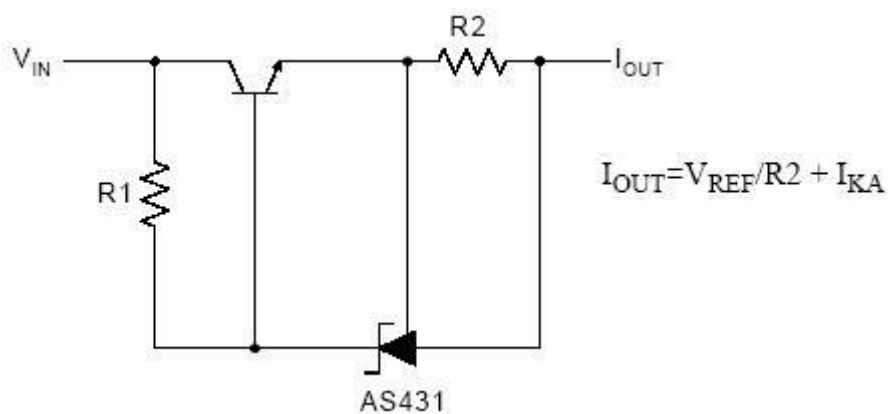


Current Source or Current Limit



ZT431 Adjustable Precision Shunt Regulations

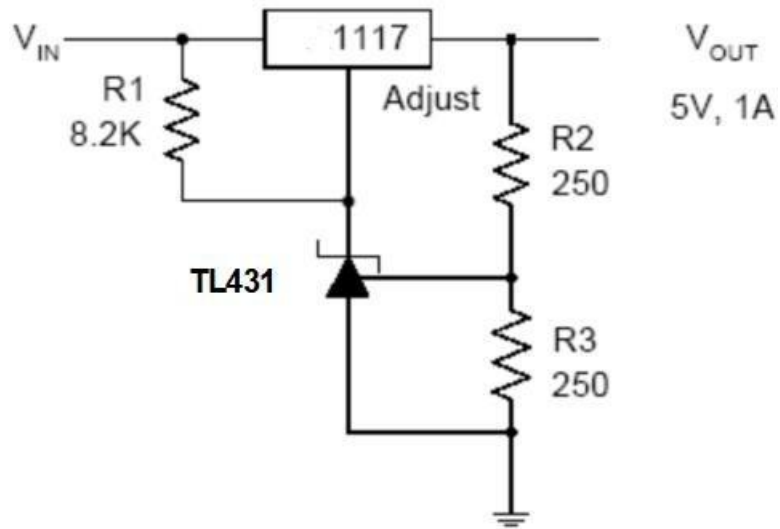

Precision 5V 1A Regulator

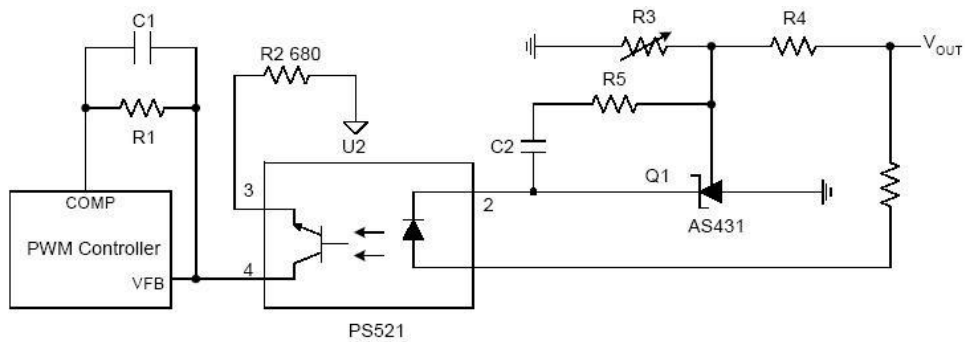


PWM Converter with Reference




ZT431 Adjustable Precision Shunt Regulations


Electrical Characteristics (Cont.)

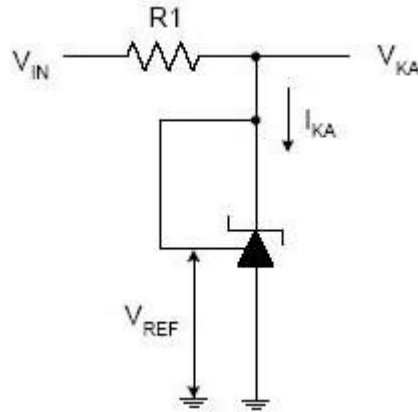

Test Circuit 4 for $V_{KA} = V_{REF}$

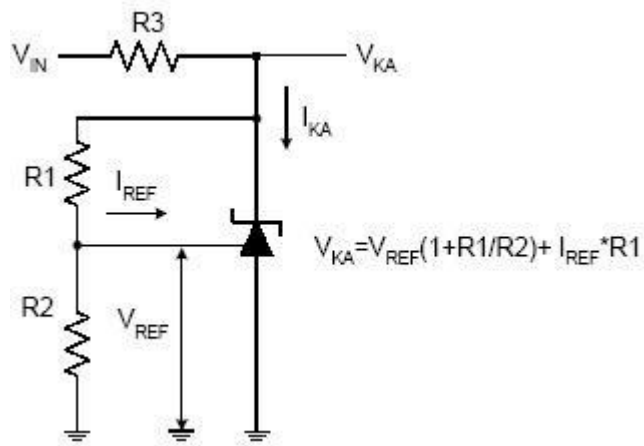

Test Circuit 5 for $V_{KA} > V_{REF}$

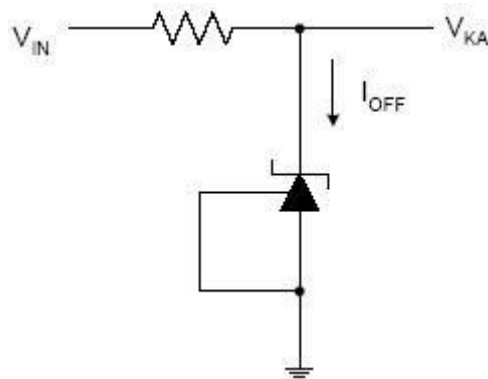


Test Circuit 6 for I_{OFF}




ZT431 Adjustable Precision Shunt Regulations

Performance Characteristics


Reference Voltage vs.ambient temperature

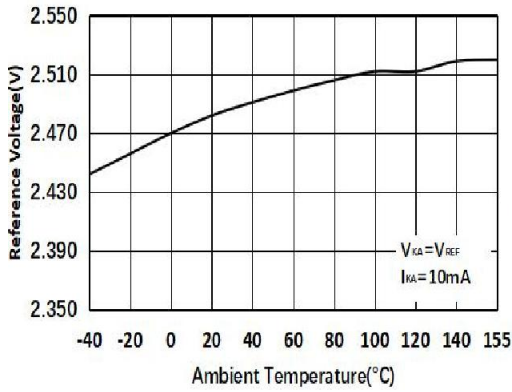


Reference Current vs. Ambient Temperature

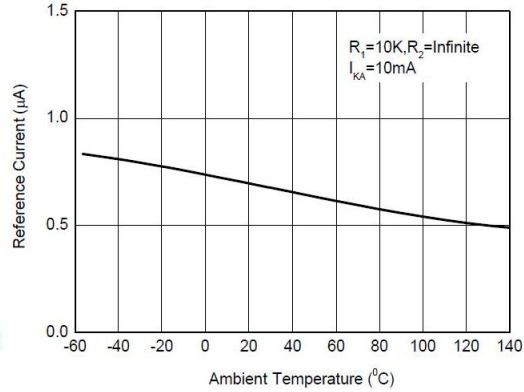


Cathode Current vs. Cathode Voltage

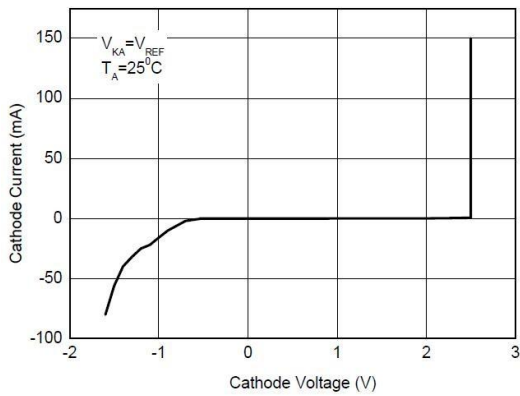


Cathode Current vs. Cathode Voltage

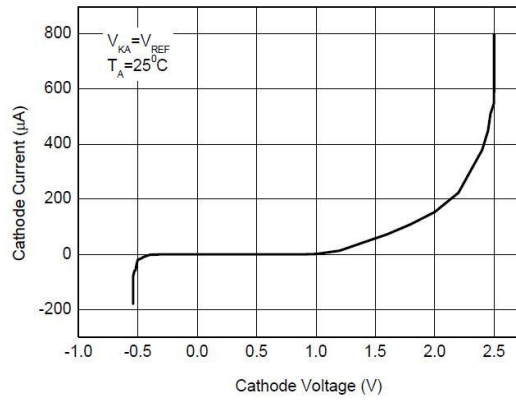

Off-State Cathode Current vs. Ambient Temperature

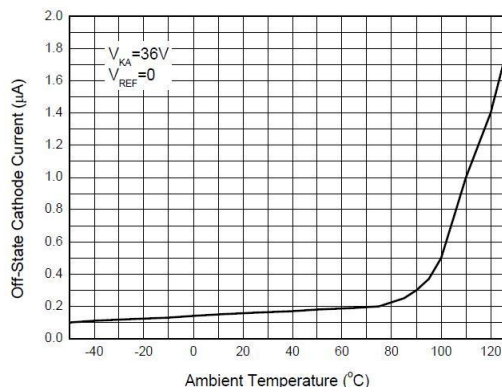

Ratio of Delta Reference Voltage to the Ratio of Delta Cathode Voltage


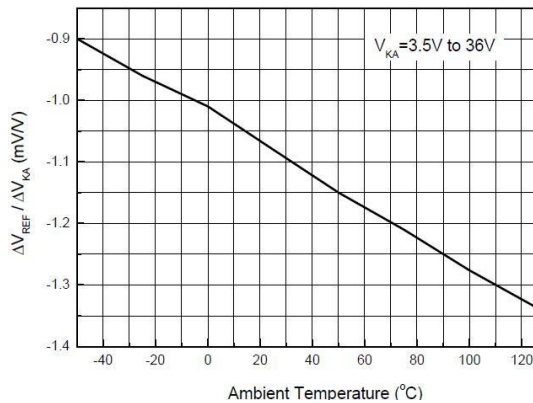






ZT431 Adjustable Precision Shunt Regulations

Performance Characteristics (Cont.)



Small Signal Voltage Gain vs. Frequency

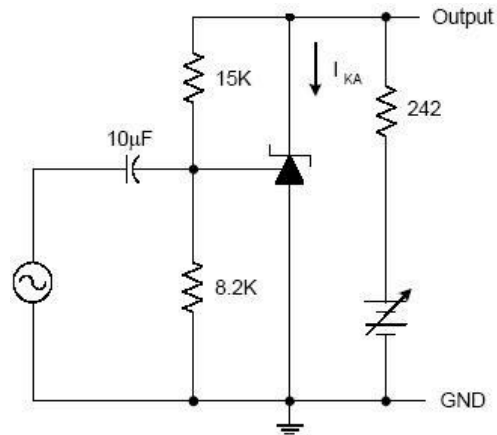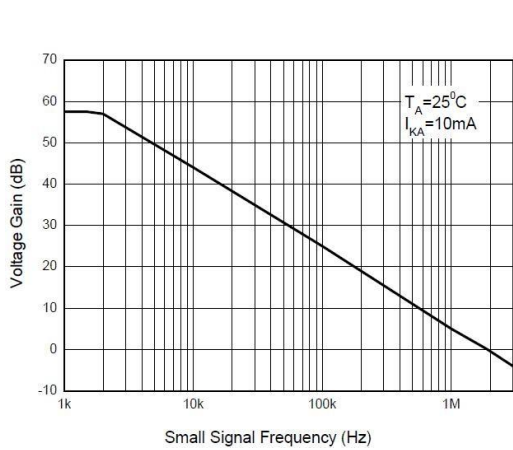

Reference Impedance vs. Frequency

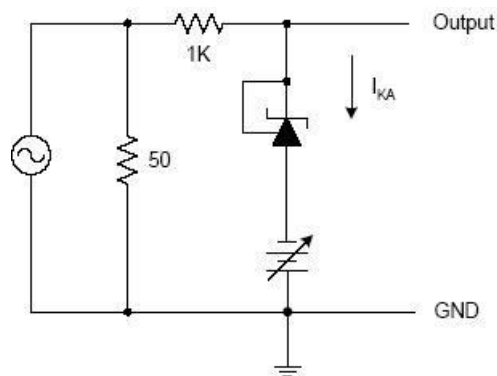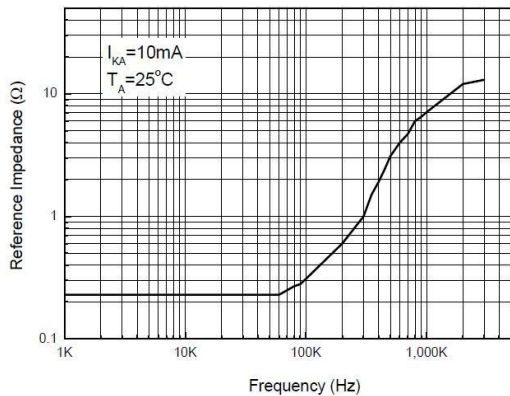

Stability Boundary Conditions vs. Load Capacitance

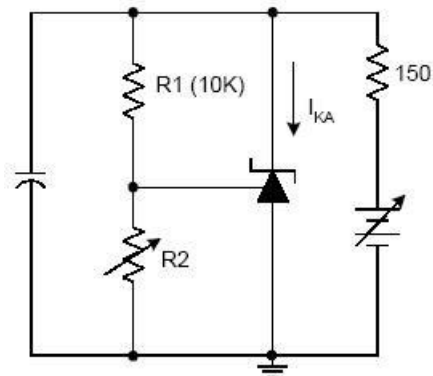
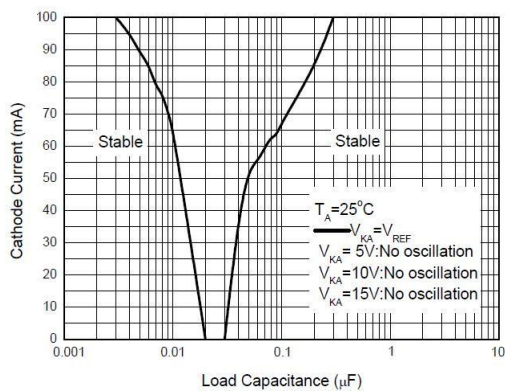




ZT431 Adjustable Precision Shunt Regulations

Performance Characteristics (Cont.)

Pulse Response of Input and Output Voltage

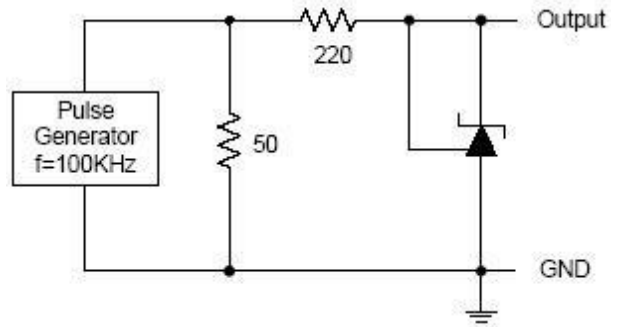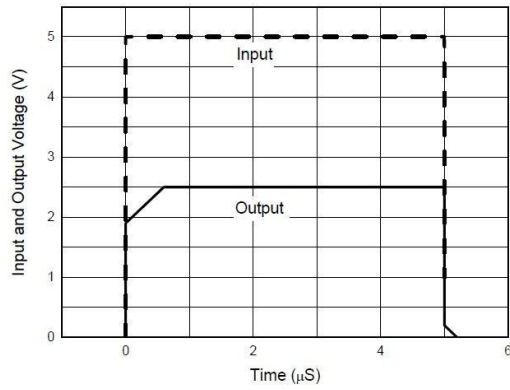




ZT431 Adjustable Precision Shunt Regulations

Package Outline Dimensions (All dimensions in mm(inch).)

TO-92 (Bulk Packing)

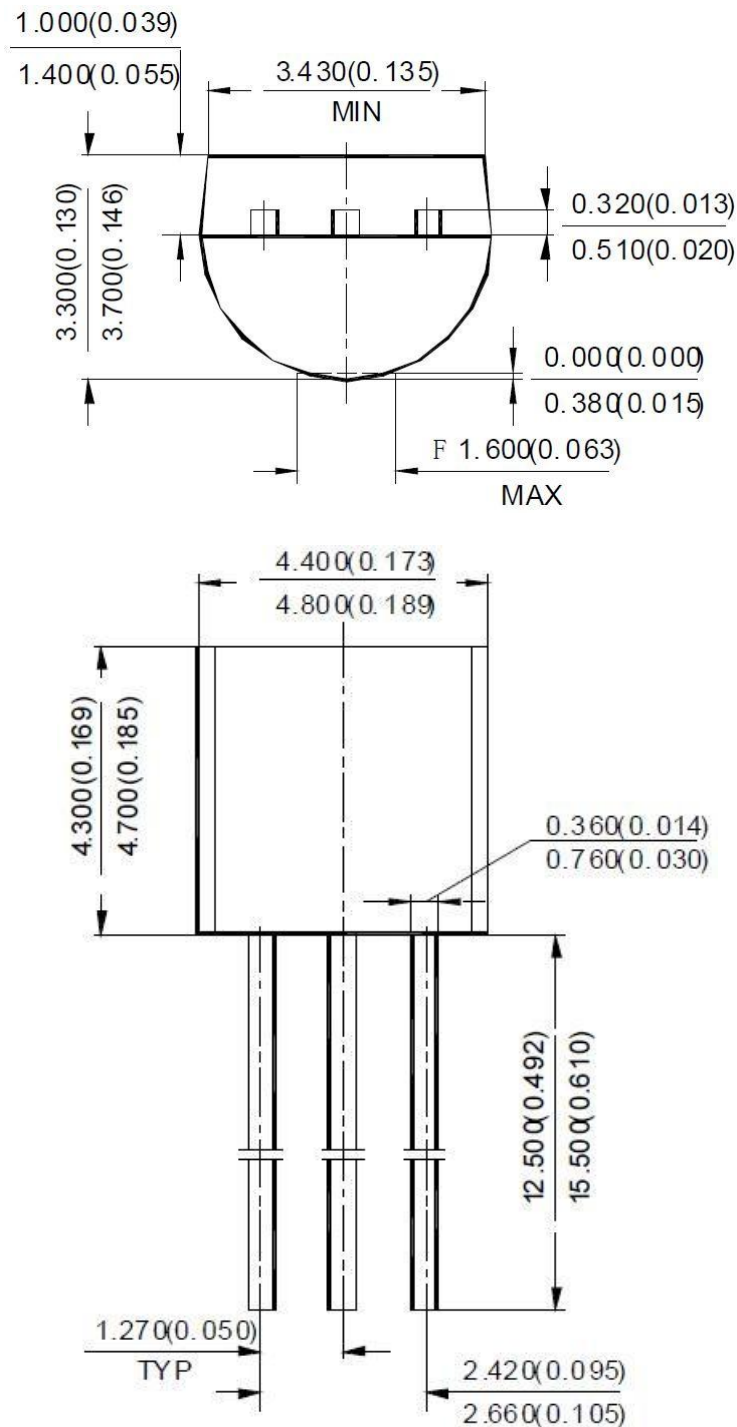




ZT431 Adjustable Precision Shunt Regulations

Package Outline Dimensions (Cont. All dimensions in mm(inch).)

TO-92 (Ammo Packing)

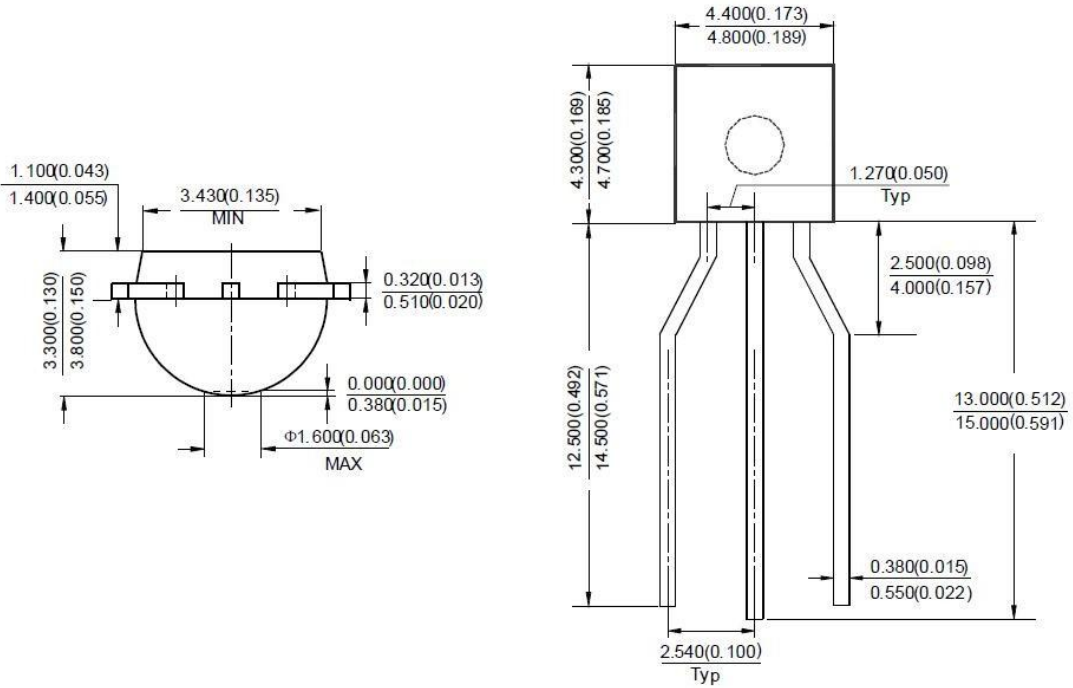




ZT431 Adjustable Precision Shunt Regulations

Package Outline Dimensions (Cont. All dimensions in mm(inch).)

SOT-23

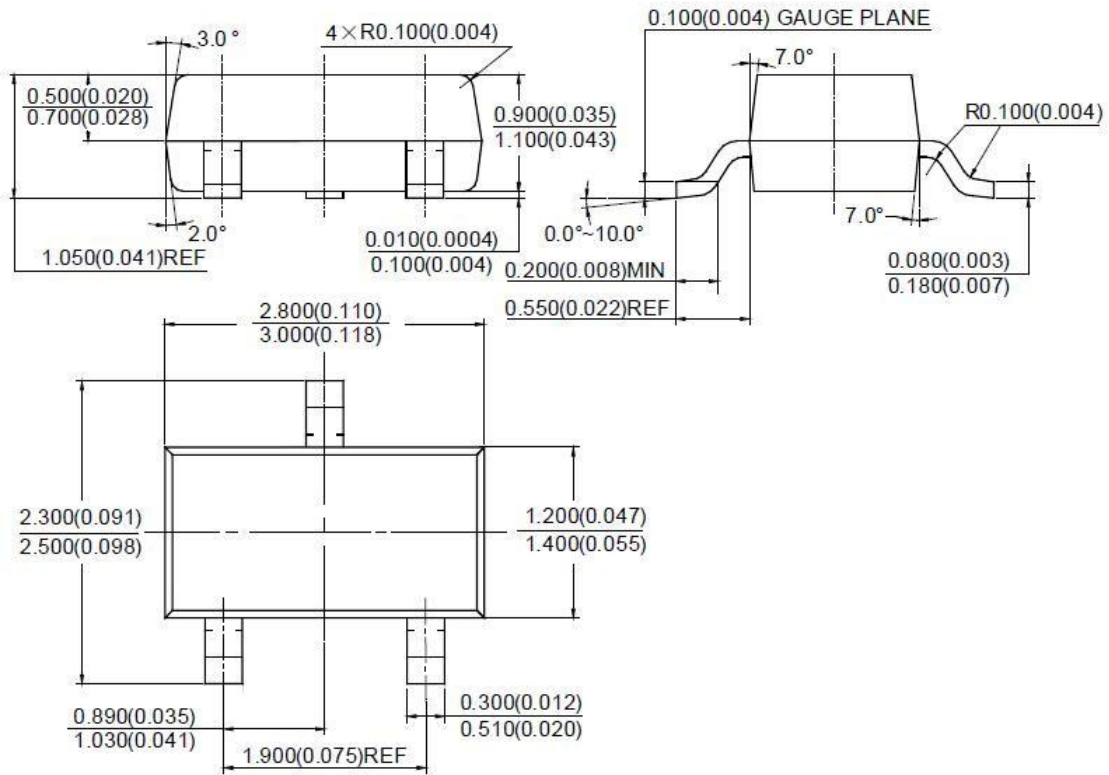



ZT431 Adjustable Precision Shunt Regulations

© ZTSOC MICROELECTRONICS Co., Ltd

ZT cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a ZT product. No circuit patent license, copyrights or other intellectual property rights are implied. ZT reserves the right to make changes to their products or specifications without notice. Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.